

# LifeASSURE™ PSN Series nylon filter cartridges

LifeASSURE™ PSN series nylon filter cartridges are highly retentive membrane filter elements designed to meet the exacting requirements of photoresist and ancillary chemical applications. Utilizing 3M Purification Inc. Advanced Pleat Technology (APT), LifeASSURE PSN series nylon filter cartridges provide maximum flow rates with minimal pressure drop, which benefits recirculation time. By increasing the rate of recirculation, particle specifications are achieved more rapidly, throughput is maximized, and cost of ownership is lowered.

The naturally hydrophilic Nylon 6,6 pleated membrane in an all high density polyethylene (HDPE) construction, provides low extractables, increased filter life, and superior reduction of gel and hard particles when compared to other membrane cartridges. LifeASSURE PSN series nylon filter cartridges are ideally suited for photoresist and ancillary chemical applications where high efficiency contaminant reduction at 0.04 µm, 0.1 µm, or 0.2 µm is required.

## Advanced Pleat Technology Provides Maximum Gel Reduction

A small amount of gel particles can normally be found in photoresists. These gels can form during the manufacturing and storage of photoresists. Their reduction from photoresists is highly dependent on differential pressure across the filtration system. Since these gels are deformable, they can extrude through a filter at high differential pressures. At low differential pressures, the forces that would deform gels are correspondingly lower and the gels are retained by the membrane media. 3M Purification Inc. has been able to maximize filtration surface area, which provides both a low inlet pressure to the pump, and low differential pressure, which is optimal for gel reduction. The increase in filtration surface area is achieved by using Advanced Pleat Technology.

## Features & Benefits

### Advanced Pleat Technology

- Maximum flow in a compact design reduces the number of filter elements
- Provides a low operating and differential pressure across the filter which minimizes outgassing and microbubble formation
- A lower pressure drop increases the rate of recirculation which allows particle counts to be achieved more rapidly while reducing energy and wear on the pumps
- Increased throughput and filter lifetime which lowers cost-of ownership
- Superior reduction of gel particles for reduced defectivity

### Naturally Hydrophilic Nylon 6,6 Membrane

- No need to pre-wet cartridge with IPA and flush, which reduces chemical interaction and a potential source of contamination
- Reduces chemical usage since no prewetting or flushing is required
- Reduces potential for microbubble formation by not dewetting in outgassing fluids unlike naturally hydrophobic membranes such as Polypropylene, UPE, and PTFE
- Reduces downtime and increases overall equipment effectiveness (OEE)
- Economic alternative to UPE and PTFE membranes

### Low Cartridge Extractables

- No change to photospeed, viscosity, and molecular weight, unlike other filter materials which can extract ionic, organic, and metallic contaminants



## Applications

- 157 nm Photoresists
- 193 nm Photoresists
- 248 nm Photoresists
- I-line Photoresists
- G-line Photoresists
- Alcohols
- Bases
- Developers
- Etchants / Strippers
- Solvents

The lifetime of a pleated cartridge filter is often dictated by the accessible surface area. Conventional pleated filters may offer a large gross surface area, but when the media is packed into the cartridge, only part of the surface area is used resulting in both flow restrictions and limited contaminant holding capacity. The “blind” or unused area commonly occurs near the inside diameter (Figure 1) where the pleats are most tightly compressed. The LifeASSURE™ PSN series nylon filter cartridges are manufactured using a staggered and stepped configuration (Figure 2), which reduces open space between the outside pleats. This novel technology maximizes capacity by increasing the open area which allows for greater particle loading at the inside diameter, while the shorter stepped pleats take advantage of existing open space closer to the outside diameter of the cartridge. The result is a fully used surface area that provides superior filter life.

## LifeASSURE™ PSN Series Nylon Filter Cartridge Construction

LifeASSURE PSN series nylon filter cartridges are constructed of high efficiency naturally hydrophilic Nylon 6,6 membrane (Figure 3) that does not need to be pre-wet with IPA and flushed. By reducing those process steps IPA chemical usage, hazardous waste disposal, and system downtime are reduced. The outer cage, inner core, end cap adapters and membrane supports are made of high-density polyethylene (HDPE) which has low extractables. No adhesives, binders, or surfactants are used in the manufacturing process. Cartridges are manufactured and double-bagged in a clean room environment under ISO certified quality systems using the most advanced non-contact thermoplastic welding techniques which ensure filter integrity and superior downstream cleanliness out of the package. All LifeASSURE PSN series nylon filter cartridges are integrity tested in both membrane subassembly and final cartridge forms, unlike some filter manufacturers who only integrity test the membrane subassembly.

## Cartridge Extractables

The filters Nylon 6,6 and HDPE materials of construction ensure that ionic, organic, and metallic contaminants are not being added back into the process chemical. Ionic, organic, and metallic contaminants can extract from other filter materials, which may change the photo speed, viscosity, or molecular weight of the process chemical.

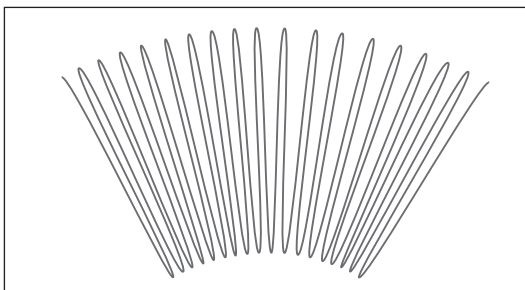


Figure 1. - Conventional Pleating

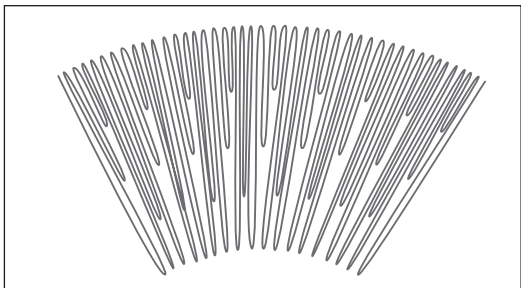


Figure 2. - Advanced Pleat Technology

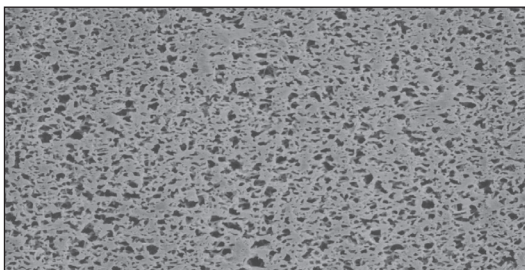


Figure 3. - SEM Nylon 6,6 Media

Cartridge Component	Material of construction
Outer Cage, Inner Core, End Cap Adapters, and Membrane Support Layers	High Density Polyethylene (HDPE)
Membrane	Naturally Hydrophilic Nylon 6,6
Cartridge Dimensions	Dimension (see ordering guide)
Filtration Surface Area	11.22 ft <sup>2</sup> (1.04 m <sup>2</sup> )
Outside Diameter (Nominal)	2.75" (7 cm)
Overall Length (Nominal)	10, 20, and 30 inches (25.4, 50.8, and 76.2 cm)

Operating Parameters	Specification
Max. Operation Temperature	122 °F (50 °C)
Max. Forward Differential Pressure	60 psid @ 77 °F ( 4.1 bar @ 25 °C)
Reduction Ratings (µm)	0.04, 0.1, 0.2


Metal	Detection Limit (ppb)	24 Hour Extraction	120 Hour Extraction
Ca	0.9	< DL	< DL
Cr	0.3	< DL	< DL
Cu	0.9	< DL	< DL
Fe	0.9	< DL	< DL
K	0.9	< DL	< DL
Na	3.0	< DL	< DL

\* Analysis using Graphite Furnace Atomic Absorption, extraction using PGMEA.


Table 1. - Typical Metals Analysis\*

## LifeASSURE™ PSN Series Nylon Filter Cartridge Compatibility Guide

This listing is intended as a guide for selecting the appropriate 3M Purification Inc. filter based on compatibility with most common chemicals. This information is based on technical publications, laboratory experiments, data from material suppliers, and field tests. It is recommended that compatibility of the filter with these chemicals be established in the specific chemical application because actual performance may differ as a result of variations in temperature, concentration, exposure time, or other factors. Consideration must also be given in selection of a suitable gasket material to assure complete compatibility.

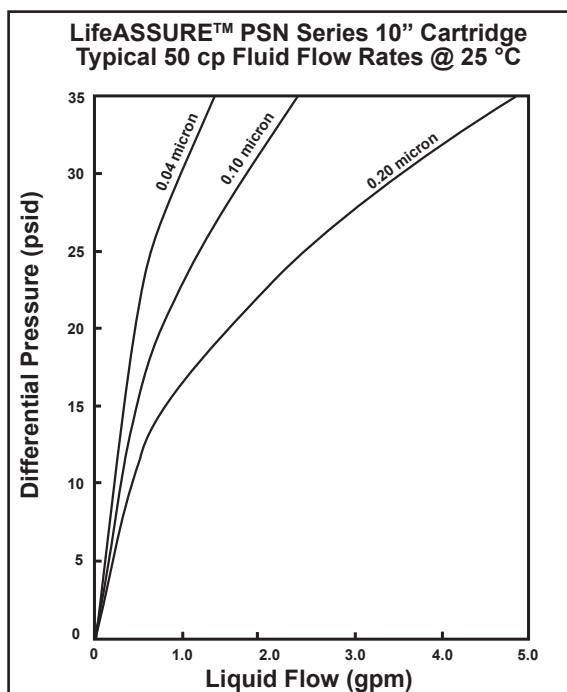

Typical Pressure Drop vs. Liquid Flow at 50 cp

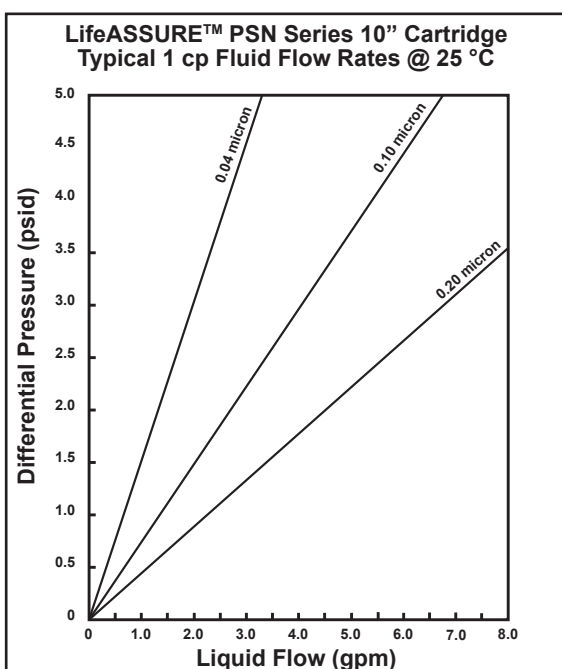

Typical Pressure Drop vs. Liquid Flow at 1 cp

Chemical	LifeASSURE™ PSN Nylon	Chemical	LifeASSURE™ PSN Nylon
Acetone	R	Glycerol	R
Ammonium Fluoride (40%)	R	2-Heptanone	LR
Ammonium Hydroxide (conc)	LR	2-Hexanone	LR
Anisole	R	Isobutanol	R
Aquatar®	R	IPA	R
Aquatar 2	N	Methanol	R
Butanol	R	MAK®	R
Butyl Acetate	R	MEK	N
Butyl Alcohol	R	MMP®	R
BOE®	R	NMP®	R
Cyclohexanone	LR	NOE	R
Cyclopentanone	LR	P-Etch	N
DIGLYME	R	PEGMEA	R
Dimethylsulfoxide (DMSO)	R	PGMEA	R
DMC	R	Piranha®	N
DMF	R	Potassium Hydroxide (conc)	LR
Ethanol	R	Propylene Glycol	R
ECA	R	RCA Etch	N
EGMEA	R	SC1	N
Ethyl Acetate	R	SC-2®	N
Ethyl Lactate	R	Silicone Oils	R
Ethyl Pyruvate	R	Sodium Hydroxide (conc)	LR
Ethyl 3-Ethoxy Propionate	R	TMAH (5%)	LR
Ethylene Glycol	R	Xylene	N

R = Recommended N = Not Recommended LR = Limited Recommendation\*


\* Please consult your 3M Purification Inc. Sales Specialist or 3M Purification Inc. Technical Support for specific concentrations.

# LifeASSURE™ PSN Series Filters


## LifeASSURE™ PSN Series Ordering Guide

Cartridge	Reduction Rating (µm)	Configuration	Length (Inches)	End Modification	Gasket/O-ring Material
PSN	004 - 0.04 010 - 0.1 020 - 0.2	F	01 - 10 02 - 20 03 - 30	C - 222 O-ring & Spear F - 222 O-ring & Flat Cap	C - EPR K - PTFE-encapsulated fluorocarbon

Dimensions of C style end modification

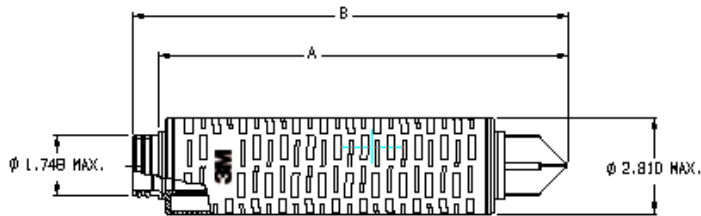

Dimensions of F style end modification

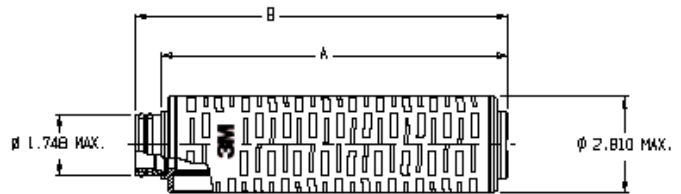

Dimension	Overall Nominal Cartridge Length (Inches)		
	-01	-02	-03
A	11.8	21.6	31.3
B	12.6	22.3	32.0

Dimension	Overall Nominal Cartridge Length (Inches)		
	-01	-02	-03
A	10.0	19.7	29.5
B	10.8	20.5	30.2

### Important Notice

The information described in this literature is accurate to the best of our knowledge. A variety of factors, however, can affect the performance of the product(s) in a particular application, some of which are uniquely within your knowledge and control. **INFORMATION IS SUPPLIED UPON THE CONDITION THAT THE PERSONS RECEIVING THE SAME WILL MAKE THEIR OWN DETERMINATION AS TO ITS SUITABILITY FOR THEIR USE. IN NO EVENT WILL 3M PURIFICATION INC. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE WHATSOEVER RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION.**

It is your responsibility to determine if additional testing or information is required and if this product is fit for a particular purpose and suitable in your specific application.

**3M PURIFICATION INC. MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.**

### Limitation of Liability

3M Purification Inc. will not be liable for any loss or damage arising from the use of the Product(s), whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states and countries do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you.

Your Local Distributor:



### 3M Purification Inc.

400 Research Parkway  
Meriden, CT 06450  
U.S.A.  
(800) 243-6894  
(203) 237-5541  
Fax (203) 630-4530  
www.3Mpurification.com

3M is a trademark of 3M Company.  
LifeASSURE is a trademark of 3M Company used under license.  
All other trademarks are the property of their respective owners.  
© 2010 3M Company. All rights reserved.  
Please recycle. Printed in U.S.A.  
70-0201-8725-1  
REV 1210